

HIGH PERFORMANCE WATERJET CUTTING BOARD



TECHNICAL DATA SHEET

| PROPERTIES | | NIDAJET | | | | STANDARD |
|--------------------------------------|--|---|-------------------|-------------------|-------------------|-------------------|
| | | 40 | 60 | 60 HP | 100 HP | |
| Product characteristics | Water only cutting | ✓ | ✓ | ✓ | ✓ | ISO 1923 |
| | Abrasive cutting | ✗ | ✗ | ✓ | ✓ | |
| | Material | Polypropylene 50% recycled - 100% recyclable | | | | |
| | Size | 800 x 1200 mm - 1220 x 2134 mm - 1220 x 2500 mm | | | | NFEN 29 073-1 |
| | Thicknesses | 40 mm | 60mm | 60 mm | 100 mm | |
| | Weight / panel | 800 x 1200 mm | 2.88kg / 6.35lb | 4.32kg / 9.52lb | 6.34kg / 13.98lb | |
| | | 1220 x 2134 mm | 7.81kg / 17.22lb | 11.71kg / 25.82lb | 17.20kg / 37.92lb | 28.64kg / 63.14lb |
| | | 1220 x 2500 mm | 10.60kg / 23.37lb | 15.90kg / 35.05lb | 20.13kg / 44.38lb | 33.55kg / 73.97lb |
| | Other sizes and thicknesses | Contact us | | | | |
| | Cell size | 8 mm hexagonal cells | | | | |
| | Layer on both sides | 50 µm polypropylene film 45 g/m ² polyester non-woven | | | | |
| | Chemical properties | Excellent resistance to water, most acids, bases and salt solutions | | | | |
| Resistance to ultraviolet rays (U.V) | The longevity for the core's storage is guaranteed by an anti U.V. | | | | | |
| Shock resistance | Increased by copolymer PP used | | | | | |

NOTA : The indicated directions can serve as a guide to use the product but cannot be considered as a guarantee of a good working up. Additionally application, utilization and/or transformation of the products escape our control possibilities. As a consequence, they exclusively remain the responsibility of the user and/or the transformer.


3 BOARD SIZES

1200 X 800 MM

1220 X 2134 MM
CONTAINERS SIZE

1220 X 2500 MM

TECHNICAL DIAGRAM

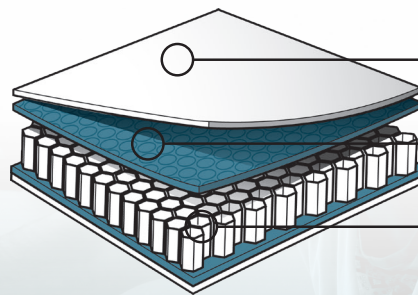

Polyester non-woven

Polypropylene film

Polypropylene honeycomb



NIDAJET - 1524 Rue de la Paix - 59970 Fresnes-Sur-Escout - FRANCE
Tél.: +33 (0)6 84 81 93 47
info@nidajet.com - www.nidajet.com

